

Pressure Independent Control Valve

Pressure Regulating Cartridge • Axial Control Valve • Presetting Ring • 360 WOG



Features

- 3-87 PSID operating range
- +/- 5% accuracy
- Two pressure / temperature (PT) test ports
- Location tag
- ANSI class IV leakage rate
- 100% leak tested
- Control Valve Stroke: 3mm

Pressure and Temperature Rating


- 360 WOG
- 15 - 250°F

Material Specifications

Part	Material
Body	Brass - CW602N
Regulating Cartridge	High Resistance Polymer, EPDM, 303 Stainless Steel
Control Valve	Brass - CW614N, 18/8 Stainless Steel
O-rings	EPDM

MODEL #	MAX FLOW (gpm)	NPTF (in)	A	B	C	D	E
V9515-0.66	0.66	1/2	1.3	3.3	0.6	3.2	3.9
V9515-1.99	1.99	1/2	1.3	3.3	0.6	3.2	3.9
V9520-4.40	4.4	3/4	1.3	3.5	0.7	3.9	4.6
V9520-8.14	8.14	3/4	1.3	3.5	0.7	3.9	4.6
V9525-14.5	14.5	1	1.6	3.9	0.9	4.3	7.2
V9530-22.9	22.9	1.25	1.8	4.2	1.2	4.7	7.6

Compatible with all Spartan Actuators

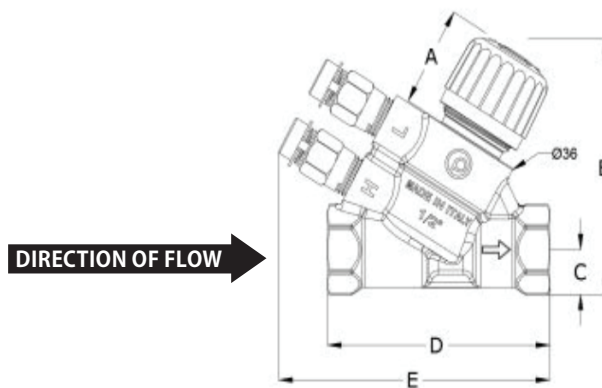

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.